

12KM MICRO/LEVEL® ISOLATOR SPECIFICATION SHEET

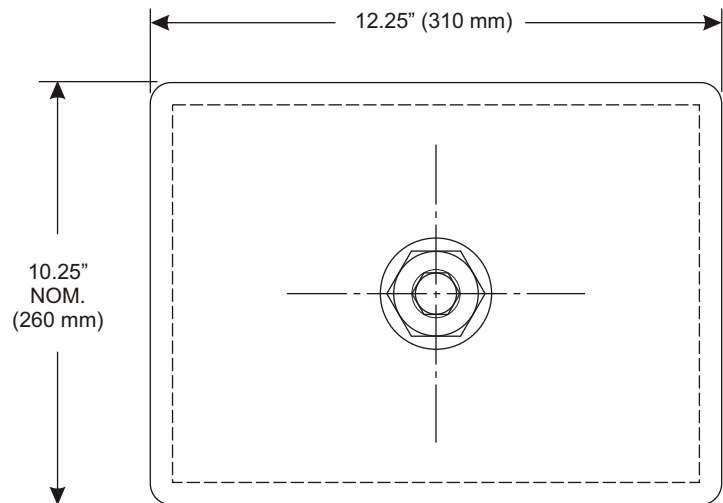




TABLE 1 - Isolator Data Average Ship Wgt. 70 lbs. (35 Kg.)

Model Number	Loaded Height ± 0.125		Targeted Installed Height ± 0.125
	Minimum	Adjustable To	
12KM550H	5.125"	5.625"	5.375"
12KM800H	5.125"	5.625"	5.375"
12KM1200H	5.125"	5.625"	5.375"

Note: Isolator data subject to change without notice.

TABLE 2 - Leveling Screw Data

Screw Model	Diameter	Thread Length	Pitch	Good for Foot Thickness up to:
1.25M	1.25"		12	

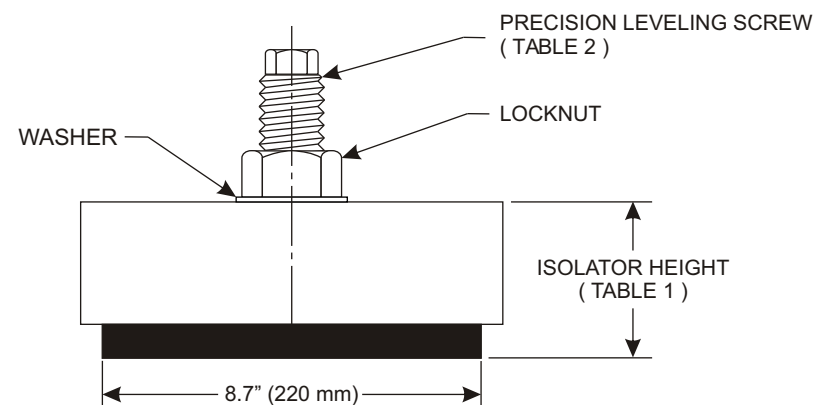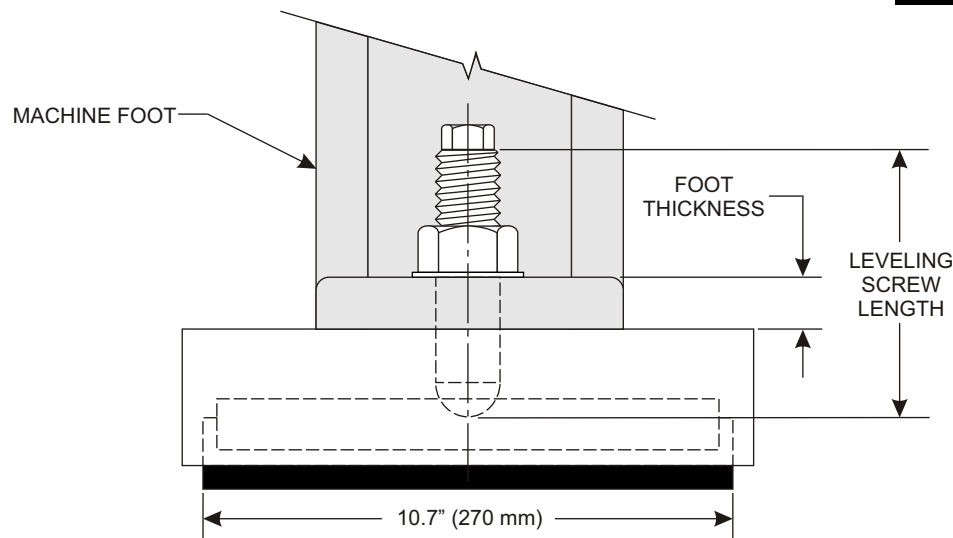

SS-12KM 06/2001